

# BB50 Hi-Speed Wire-O Binder


The BB50 Series of Wire-O® document finishers offers 2 models which accommodate a high rate of production for binding edges from 2" to 27". The BB50H finishes documents and calendars up to 20" wide, with variable output of 600-1200 books/hr., can skip bind, and includes a central hanger feed system which can be disengaged.

The BC70 is a special order unit that offers the same features as the BB50H while extending the finishing width up to 27".

The BB50 Series automatically finishes hand fed pre-punched documents with Wire-O® sizes from 1/4" up to 1", using either standard or jumbo spools in 3:1 and 2:1 pitches. Size, pitch and format changes are electronically controlled from the user-friendly 'Touch Key' pad.

## Features:

- **Versatile** - 2 models accommodate binding edges from 2" to 27". BB50H: finishes documents and calendars up to 20"; BC70: for documents and calendars up to 27" finishing width.
- **Productive** - High output speeds of 600-1200 per hour, depending on finishing type and operator skill.
- **Easy to Use** - Automatically cuts wire to length, feeds and positions wire for insertion, and finishes hand fed pre-punched documents and calendars.
- **Adaptable** - Accommodates all Wire-O® sizes from 1/4" up to 1", using either standard or jumbo spools in 3:1 and 2:1 pitches.
- **Skip Binds** - With or without hangers.
- **Hanger Features** - Central hanger feed system on both models, which can be disengaged. "Missing Hanger" detectors on both models. Uses #s 2, 3 & 4 Standard and Euroslot style hangers from 4"-16" (BB43H) up to 26" (BC70).
- **Touch Keypad Control** - Most functions variable and keypad controlled including size, pitch and format changes.
- **Accessible** - All tool changes and adjustments made easily from front of machine.
- **Efficient** - Finishes from economical Wire-O® spools. Automatic features reduce makereadys.

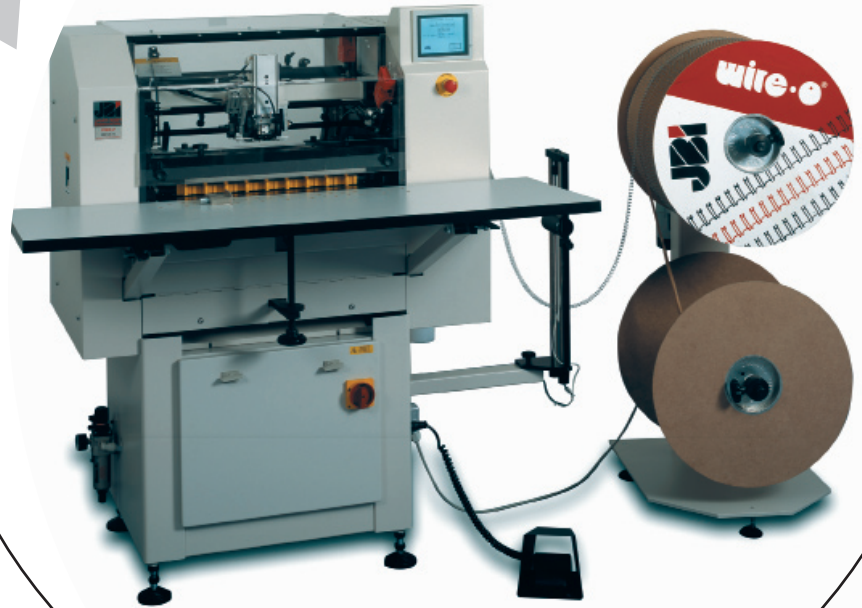

- **Ergonomic Design** - Operator-friendly with large table-top working surface helps reduce fatigue.
- **Air Required** - 80 PSI using 15 CFM max. (BB50H) 80 PSI using 22 CFM max. (BC70).
- **Voltage Requirements** - 115V 60 Hz.
- **Dimensions** - 52"H x 58"W x 45"D (BB50H), 52"H x 66"W x 48"D (BC70), 49"H x 20"W x 28"D (Spool Unwind Unit).
- **Weights** - 1437 lbs. (BB50H), 1879 lbs. (BC70), 144 lbs. (Spool Unwind Unit).

**Spiral**  **USA**  
Where Finishing Begins.™

[www.spiralbinding.com](http://www.spiralbinding.com)  
800.631.3572